


# เคเบิลไทร์

## NYLON CABLE TIES

> Material: PA66

> Flammability rating: UL94V-2

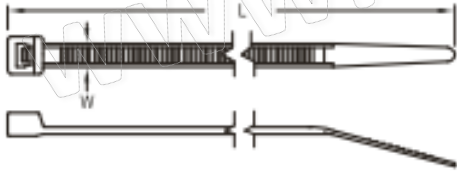

LISTED E 214907



Item No.		L	W	Max. Bundle Dia.	Min. Loop Tensile	Packing/CTN	Price	In Stock
Nature Color	Black Color	mm	mm	mm	kg(lbs)	pcs/ctn	Baht/pcs	
K-100M	K-100M-B	100	2.5	Ø 22	8.1 (18)	55,000	0.16	✓
K-150I	K-150I-B	150	3.6	Ø 35	18.2 (40)	25,000	0.44	✓
K-200I	K-200I-B	203	3.6	Ø 53	18.2 (40)	20,000	0.65	✓
K-200SD	K-200SD-B	203	4.8	Ø 50	22.2 (50)	16,000	0.73	✓
K-250SD	K-250SD-B	250	4.8	Ø 60	22.2 (50)	12,000	1.32	✓
K-300SD	K-300SD-B	300	4.8	Ø 76	22.2 (50)	11,000	1.48	✓
K-370SD	K-370SD-B	370	4.8	Ø 102	22.2 (50)	9,000	2.09	✓
K-250H	K-250H-B	250	7.6	Ø 65	54.4 (120)	6,000	2.27	✓
K-300H	K-300H-B	292	7.6	Ø 76	54.4 (120)	5,000	2.90	✓
K-370H	K-370H-B	370	7.6	Ø 102	54.4 (120)	4,000	3.48	✓
K-450H	K-450H-B	430	7.6	Ø 116	54.4 (120)	2,500	8.50	✓
K-550L	K-550L-B	550	9.0	Ø 155	79.4 (175)	2,000	10.50	✓
K-610L	K-610L-B	610	9.0	Ø 175	79.4 (175)	2,000	11.00	✓
K-780L	K-780L-B	776	9.0	Ø 228	79.4 (175)	2,000	18.00	✓
K-920L	K-920L-B	920	9.0	Ø 274	79.4 (175)	2,000	23.75	✓
K-1220L	K-1220L-B	1220	9.0	Ø 367	79.4 (175)	1,000	46.00	✓

**KST**  
Future Connection

K.S. TERMINALS INC.  
www.ksterminals.com

**NYLON CABLE TIES**  
**K-100MU 100 PCS**

L x W : 100 x 2.5 mm  
Bundle Dia : 1.6 ~ 22 mm  
Min. Loop Tensile : 8Kgs (18Lbs)  
Type Designation : TYPE 21  
Operating Temperature : -20 ~ 85°C  
For Indoor and Outdoor Use



DO NOT OPEN THE BAG BEFORE USE

MADE IN TAIWAN



+



# KST™

Future Connection

